



Modern highbayluminaire for wide variety of applications.

Diecasted aluminium housing with coolingfins on the outside.
Painted RAL 7039 anthracite grey with UV-resistant polyester powder coating.

Connection via quickconnector.
Driver integrated into luminaire.
Equipped with 6kV surge- protector.



Mounting via adjustable bracket.

Wiremountingkit as accessory.
Can be ordered in IK 10-version with protective glass.

Colourtemperature 4000K.

Lifetime L80 Ta25 50000h (B50)
MacAdam 4 SDCM CRI: >70

IP 66 | IK 05/10 | CE

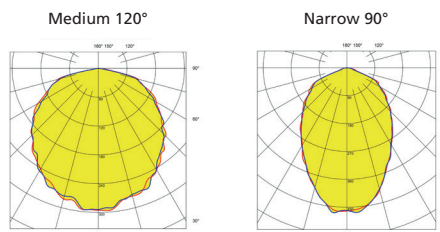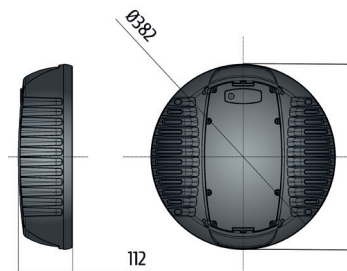

Typ Medium	Lumen	Art no.	E-no.	Power	Windarea	Weight
Atom 12000 120°	12040	7 585 31	72 145 48	97	0,034 m ²	8,8
Atom 24000 120°	24080	7 585 33	72 145 49	194	0,034 m ²	9,6
Atom 12000 120° Dali	12040	7 585 32	72 146 69	97	0,034 m ²	8,8
Atom 24000 120° Dali	24080	7 585 34	72 146 70	194	0,034 m ²	9,6

Typ Narrow	Lumen	Art no.	E-no.	Power	Windarea	Weight
Atom 12000 90°	12200	7 585 36	72 145 50	97	0,034 m ²	8,8
Atom 24000 90°	24400	7 585 38	72 145 51	194	0,034 m ²	9,6
Atom 12000 90° Dali	12200	7 585 37	72 146 71	97	0,034 m ²	8,8
Atom 24000 90° Dali	24400	7 585 39	72 146 72	194	0,034 m ²	9,6