



Modern modern highbay luminaire wide variety of applications. D-marked.

Diecasted aluminium housing with cooling fins on the outside. Painted RAL 7039 anthracite grey with UV-resistant polyester powder coating

Connection via quick connector. Driver integrated into luminaire. Equipped with 6kV surge-protector.

Mounting via adjustable bracket.


Wire mounting kit as accessory. Can be ordered in IK 10-version with protective glass.

Can be fitted with glare-reducing louvre. Can be ordered in IK 10-version with protective glass.

Available in other light colours and also with Dali dimming.


Colour temperature 4000K. Lifetime L80 Ta25 50000h (B50) MacAdam 4 SDCM CRI: >70

IP 66 D | IK 05/10 | CE



Medium 120°

Narrow 90°

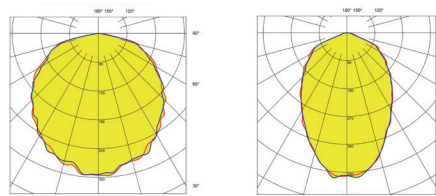

Accessory	Part. no	E-no.
Wireclips (pair)	9 550 30	79 550 30
Louvre	9 550 32	-

Typ Medium	Lumen	Art no.	E-no.	Power	Windarea	Weight
Atom 12000 120°	12040	7 585 31	72 145 48	97	0,034 m <sup>2</sup>	8,8
Atom 24000 120°	24080	7 585 33	72 145 49	194	0,034 m <sup>2</sup>	9,6
Atom 12000 120° Dali	12040	7 585 32	72 146 69	97	0,034 m <sup>2</sup>	8,8
Atom 24000 120° Dali	24080	7 585 34	72 146 70	194	0,034 m <sup>2</sup>	9,6

Typ Narrow	Lumen	Art no.	E-no.	Power	Windarea	Weight
Atom 12000 90°	12200	7 585 36	72 145 50	97	0,034 m <sup>2</sup>	8,8
Atom 24000 90°	24400	7 585 38	72 145 51	194	0,034 m <sup>2</sup>	9,6
Atom 12000 90° Dali	12200	7 585 37	72 146 71	97	0,034 m <sup>2</sup>	8,8
Atom 24000 90° Dali	24400	7 585 39	72 146 72	194	0,034 m <sup>2</sup>	9,6