



Compact wallluminaire with up- and downlight IP 65



Inner housing chromated and powder coated as standard in white RAL 9010. Outer part same but as standard darkgrey RAL 7016.

Smooth adjustable beamangle from 0°-60° with degreeindicators for both up and downlight.

Tempered protective glass and stainless screws. Connection to screwterminal inside housing.

Livfetime L70 Ta25 50000h (B50)  
MacAdams 3 SDCM CRI:>80

IP 65 | IK 07 | CE

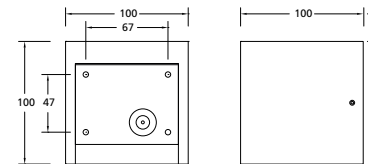

Type	Lumen	Art. no.	E-no.	Power	Weight
Elena 830	290	7 181 05	77 042 95	5,8	1