



Compact wallluminaire with up- and downlight IP 65




Inner housing chromated and powder coated as standard in white RAL 9010. Outer part same but as standard darkgrey RAL 7016.

Smooth adjustable beamangle from 0°-60° with degreeindicators for both up and downlight.

Tempered protective glass and stainless screws. Connection to screwterminal inside housing.

Lifetime L70 Ta25 50000h (B50)
MacAdam 3 SDCM CRI:>80

IP 65 | IK 07 | CE

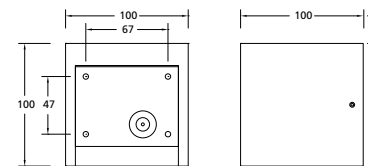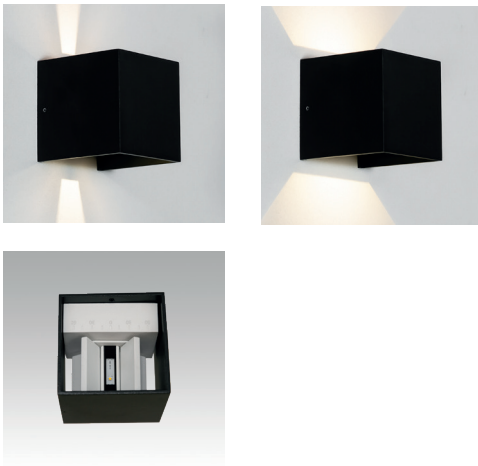

| Type | Lumen | Art. no. | E-no. | Power | Weight |
|-----------|-------|----------|-----------|-------|--------|
| Elena 830 | 290 | 7 181 05 | 77 042 95 | 5,8 | 1 |