

D-marked enclosed IP 44 luminaire.

Slim housing of galvanized steel.
Powdercoated RAL 9016. Endscaps made from high-impact plastic.
Linearprismatic opal acrylic diffuser.

Mounting flush to ceiling, on adjustable brackets, rails or wire.


Connection via ends or top surface. As standard with 5-pole terminalblock.

Sensor turns on and off with motion.
TDC sensor switches on with motion and then goes down to 10%, switches off after absence of motion for 30 min.

Available in several versions depending on dimming, control and connection options.

Lifetime L80 Ta25 70000h (B50)
MacAdam 3 SDCM CRI: >80

IP 44 D | CE

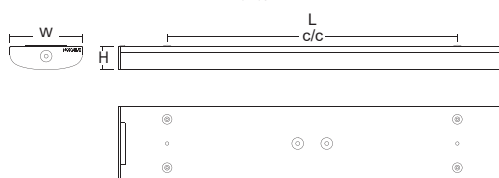


45 Bracket



Wirebracket

Accessories	Art no.	E no.
Wirebracket (pair)	9 550 30	79 550 30
Shelterbracket/part	9 550 26	79 104 29
Adjustable bracket (pair)	9 550 18	79 550 19
45/90 bracket (pair)	9 550 10	79 550 10
45 bracket (pair)	9 550 11	-

Spare parts	Art no.	E no.
Opal shade 589 mm	9 552 74	79 550 41
Opal shade 1189 mm	9 552 76	79 550 43
Opal shade 1488 mm	9 552 78	79 550 45
Frosted shade 1488 mm	9 552 80	-



Type	Lumen	Art no. 830	E no.	Lumen	Art no. 840	E no.	L	W	H	c/c	Power	Weight
Humid LED 2300	2210	4 534 08	72 541 04	2330	4 534 10	72 541 05	592	152	50	500	20	3
Humid LED 4000	4070	4 534 22	72 126 85	4280	4 534 26	72 126 87	1192	152	50	900	34	4
Humid LED 4600	4620	4 534 01	72 541 00	4870	4 534 03	72 541 01	1192	152	50	900	40	4
Humid LED 6000	5700	4 535 01	72 126 89	6000	4 535 05	72 126 91	1492	152	50	1200	49	4
Humid LED 2300 Sensor	2210	4 534 16	72 113 39	2330	4 534 18	72 113 40	592	152	50	500	20	3
Humid LED 4000 Sensor	4070	4 534 24	72 126 86	4280	4 534 28	72 126 88	1192	152	50	900	34	4
Humid LED 4600 Sensor	4620	4 534 02	72 541 08	4870	4 534 04	72 541 09	1192	152	50	900	40	4
Humid LED 6000 Sensor	5700	4 535 03	72 126 90	6000	4 535 07	72 126 92	1492	152	50	1200	49	4
Humid LED 2300 TDC*	2210	4 534 12	72 541 06	2330	4 534 14	72 541 07	592	152	50	500	20	3
Humid LED 4000 TDC*	4070	4 534 30	72 132 73	4280	4 534 34	72 132 79	1192	152	50	900	34	4
Humid LED 4600 TDC*	4620	4 534 05	72 541 02	4870	4 534 06	72 541 03	1192	152	50	900	40	4
Humid LED 6000 TDC*	5700	4 535 09	72 132 83	6000	4 535 13	72 132 89	1492	152	50	1200	49	4
Humid LED 2300 Sensor TDC*	2210	4 534 19	72 132 71	2330	4 534 15	72 132 72	592	152	50	500	20	3
Humid LED 4000 Sensor TDC*	4070	4 534 32	72 132 78	4280	4 534 36	72 132 80	1192	152	50	900	34	4
Humid LED 4600 Sensor TDC*	4620	4 534 07	72 132 81	4870	4 534 09	72 132 82	1192	152	50	900	40	4
Humid LED 6000 Sensor TDC*	5700	4 535 11	72 132 88	6000	4 535 15	72 132 90	1492	152	50	1200	49	4
Humid LED 8500 Frost	8230	4 535 21	72 126 93	8660	4 535 25	72 132 70	1492	152	50	1200	58	4
Humid LED 8500 Frost TDC*	8230	4 535 29	72 132 91	8660	4 535 33	72 132 92	1492	152	50	1200	58	4

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.