


INTERIOR | INLED AS

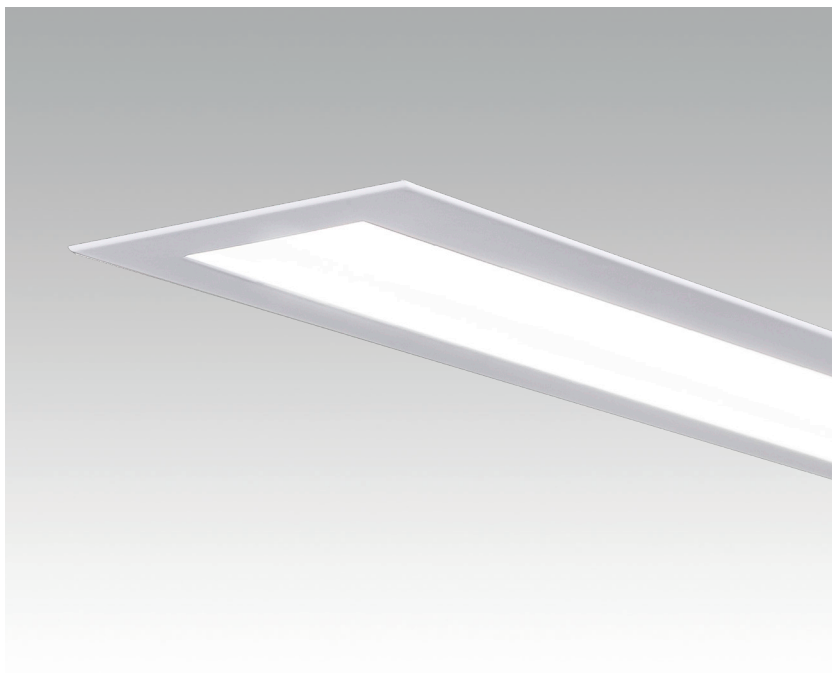

Asymmetrical luminaire for recessed mounting. Suitable for wall or whiteboard lighting.

White painted galvanised housing and frame RAL 9016.

Fit to 600 modular ceiling with T-profile.

Equipped with asymmetrical optics and opal light diffuser.


Amplitudedimming on TDC, Touch-Dim or Dali versions, also has an integrated corridor function. Ballast located inside fixture.

As standard with Halogen-free 2.5 m cable with earthed plug. Dimmable (TDC) also equipped with separate 2-wires for control.

IP44 rated when fitted in ceiling.

Lifespan L80 Ta25 70000h (B50)
MacAdam 3 SDCM CRI:>80

IP 44 / 21 | CE

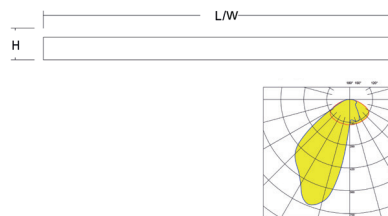

Type	Lumen 830	Art no. 830	E no.	Lumen 840	Art no. 840	E no.	L	W	H	Power	Weight
InLED 12.1 3000	2930	1 550 00	70 162 66	3050	1 550 04	70 162 67	1195	95	50	36	3,5
InLED 12.1 3000 TDC *	2930	1 550 08	70 162 68	3050	1 550 12	70 162 69	1195	95	50	36	3,5

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.