



Small spotlight for 3-phase track.



Rotating aluminium housing.  
Direction-adjustable diecast aluminium housing with integrated cooling.

As standard RAL 9016 white. Pure aluminium faceted reflector. 24-degree beam angle.

As standard with a 3-phase universal adapter.

Lifespan L80 Ta25 50000h (B50)  
MacAdam 3 SDCM CRI: >80

IP 20 | CE

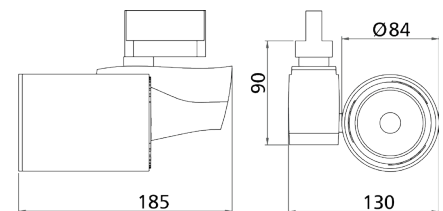

Type	Lumen	Art no.	E no.	Power	Weight
Rigel 1100 830 24°	1110	2 624 01	74 005 97	12	1
Rigel 1100 840 24°	1130	2 624 03	74 005 98	12	1
Rigel 2000 830 24°	1790	2 624 05	74 005 99	22	1
Rigel 2000 840 24°	1820	2 624 07	74 006 00	22	1