



IP 65 enclosed luminaire.

Diecast aluminium housing, powdercoated RAL 9006 silver-grey as standard. Tempered glass front with stainless corner bracket and mounting screws.

Rotatable optic for both symmetrical or asymmetrical light distribution.

Comes with 5-pole terminalblock as standard. Connection via dual grommets in rear end. Integrated 8kV surge protector.


Supplied with wall, ceiling or recessed mountings as standard.

Corner brackets for the wall version and cable fasteners for the ceiling version are available.

Replacement kits are available for full conversion of previous versions to LED.

Lifespan L80 Ta25 50000h (B50)
MacAdam 3 SDCM CRI: >70




IP 65 | CE



Wall-bracket



Recess frame

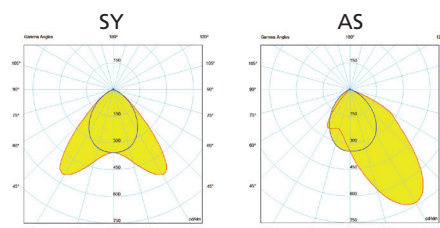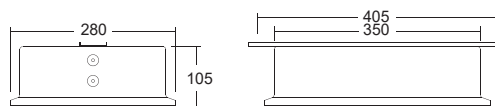

Accessory	Art no.	E no.
Wirebracket (pair)	9 550 30	79 550 30
Bracket	9 159 05	77 159 05
Sistema LED 4000 730 SY replacement kit	9 759 81	77 035 81
Sistema LED 4000 740 SY replacement kit	9 759 83	77 035 82
Sistema LED 4000 730 AS replacement kit	9 759 85	77 035 83
Sistema LED 4000 740 AS replacement kit	9 759 87	77 035 84

Ceiling

Type	Lumen	Art no. 730	E no.	Lumen	Art no. 740	E no.	Power	Weight
Sistema LED 4000 SY	3920	7 571 35	77 035 69	4000	7 571 38	77 035 70	35	4,8
Sistema LED 4000 AS	3630	7 571 36	77 035 71	3710	7 571 39	77 035 72	35	4,8

Wall

Type	Lumen	Art no. 730	E no.	Lumen	Art no. 740	E no.	Power	Weight
Sistema LED 4000 SY	3920	7 571 41	77 035 73	4000	7 571 44	77 035 74	35	4,8
Sistema LED 4000 AS	3630	7 571 42	77 035 75	3710	7 571 45	77 035 76	35	4,8

Recessed

Type	Lumen	Art no. 730	E no.	Lumen	Art no. 740	E no.	Power	Weight
Sistema LED 4000 SY	3920	7 571 47	77 035 77	4000	7 571 50	77 035 78	35	4,8
Sistema LED 4000 AS	3630	7 571 48	77 035 79	3710	7 571 51	77 035 80	35	4,8