



Rotatable and adjustable downlight in two sizes.

Housing and frame made from diecasted powdercoated aluminium RAL 9016.


Reflector made from specular purealuminium with 36-degree lightdistribution.

Mounts in ceiling with springs. Connection to separate driverbox. Available with TouchDim (TD), or DALI.

As standard with Halogen-free 2.5 m cable with earthed plug. Dimmable (TD) also equipped with separate 2-wires for control.

Lifespan L80 Ta25 50000h (B50)
MacAdam 3 SDCM CRI: >80

IP20 | CE

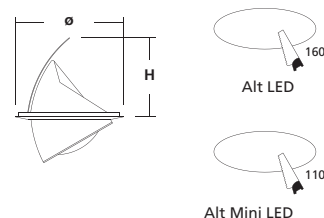


Accessories	Art no.	E no.
Mounting rails for soft ceilings	9 687 01	74 677 01
Plate for soft ceilings Alt	9 665 42	-
Plate for soft ceilings Alt Mini	9 665 45	75 011 49

Mounting rails for soft ceilings



Plate for soft ceilings

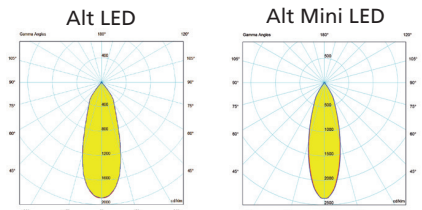

Type	Lumen	Art no. 830	E no.	Lumen	Art no. 840	E no.	H	ø	Power	Weight
Alt LED 2000	1810	2 861 05	74 684 90	1850	2 861 06	-	135	170	21	2
Alt LED 3000	2680	2 861 01	74 684 91	2730	2 861 02	-	135	170	32	2
Alt LED 2000 TD *	1810	2 861 07	74 642 82	1850	2 861 09	-	135	170	21	2
Alt LED 3000 TD *	2680	2 861 03	74 684 92	2730	2 861 04	-	135	170	32	2
Alt Mini LED 1100	1140	2 862 01	74 668 43	1160	2 862 02	74 668 44	114	119	12	1
Alt Mini LED 1100 TD *	1140	2 862 03	74 668 45	1160	2 862 04	74 668 46	114	119	12	1

* Equipped with Dali dimming driver or push-button.