



Cover

IP 65 wall and ceiling fixture in three versions.

Diecasted aluminium front and housing, UV-resistant powdercoated polyesterpaint RAL 9006 silver-grey.

UV-resistant polycarbonate diffuser, Frosted for Cover, Opal for Grid and Stripe. Stainless screws.

Lifespan L80 Ta25 50000h (B50)  
MacAdam 3 SDCM CRI: >80



IP 65 | IK 10 | CE



Stripe



Grid

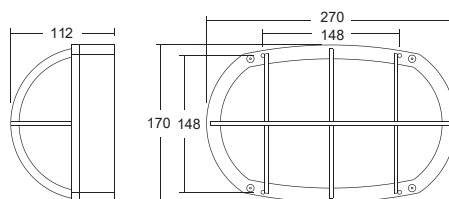

Type	Lumen	Art no.	E no.	Power	Weight
Arte Grid LED 1000 830	600	7 361 12	77 022 35	10	2,5
Arte Grid LED 1000 840	610	73 61 14	-	10	2,5

Type	Lumen	Art no.	E no.	Power	Weight
Arte Stripe LED 1000 830	400	7 361 16	77 022 37	10	2,5
Arte Stripe LED 1000 840	410	7 361 17	-	10	2,5

Type	Lumen	Art no.	E no.	Power	Weight
Arte Cover LED 1000 830	580	7 361 20	77 022 33	10	2,5
Arte Cover LED 1000 840	600	7 361 22	-	10	2,5