





Frosted shade



Alu. Dekor



Ceiling mounting

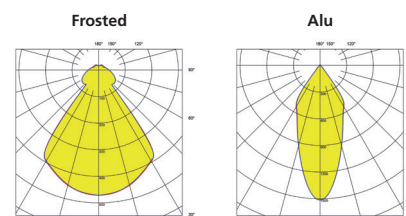

Suspended fixture.

Housing and ceiling mountings made from diecasted aluminium RAL 7039.

Reflector made from frosted polycarbonate with prismatic linear pattern on the inside.
Version with pure aluminium reflector also available (Alu). Smooth outside for easy cleaning.

Dimmable version (TD) with TouchDim or Dali.

As standard with ceiling mounting including friction lock and dual suspension wire and 1.5 m connection lead.

Lifespan L80 Ta25 100000h (B50)
MacAdam 3 SDCM CRI:>80

IP 20 | CE

Type	Lumen	Frosted	E no.	Lumen	Alu	E no.	Power	Weight
Dekor LED 2700 830	2540	4 690 71	75 031 28	2060	4 690 87	75 031 37	21	3,5
Dekor LED 2700 840	2600	4 690 75	75 031 30	2100	4 690 91	75 031 39	21	3,5
Dekor LED 2700 830 TD	2540	4 690 73	75 031 29	2060	4 690 89	75 031 38	21	3,5
Dekor LED 2700 840 TD	2600	4 690 77	75 031 31	2100	4 690 93	75 031 40	21	3,5
Dekor LED 4000 830	3360	4 690 79	75 031 32	2840	4 690 95	75 031 41	34	3,5
Dekor LED 4000 840	3430	4 690 83	75 031 35	2900	4 690 99	75 031 43	34	3,5
Dekor LED 4000 830 TD	3360	4 690 81	75 031 34	2840	4 690 97	75 031 42	34	3,5
Dekor LED 4000 840 TD	3430	4 690 85	75 031 36	2900	4 691 01	75 031 44	34	3,5