


18.1

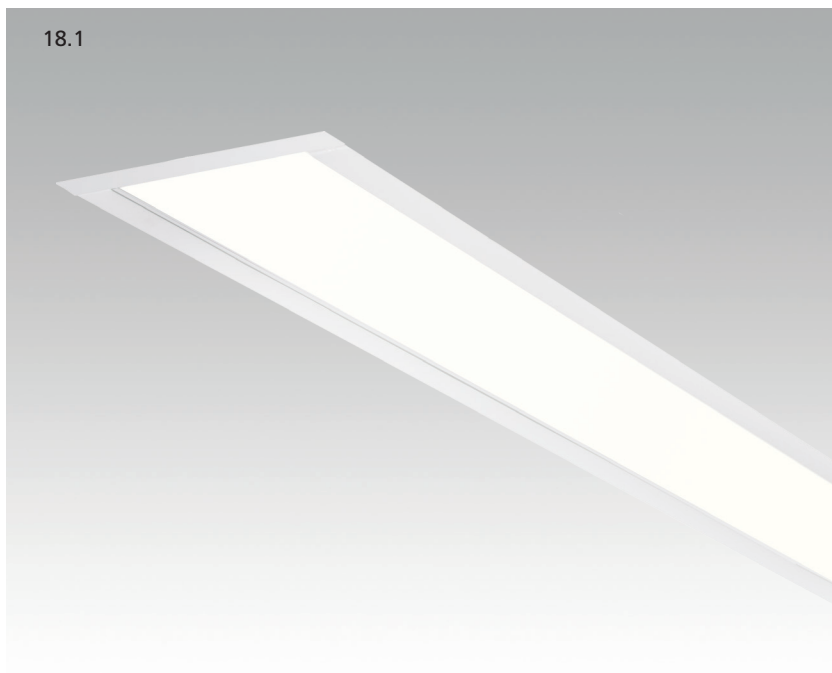

Fixture for extra long recessed mounting
White painted galvanised housing and

frame RAL 9016.

Fit to modular ceiling with T-profile.
Equipped with microprismatic and foil
diffuser (MP).



Amplitudedimming on TDC, Touch-Dim
or Dali versions, also has an integrated
corridor function. Ballast located inside
fixture.

As standard with Halogen-free 2.5 m
cable with earthed plug, Dimmable
(TDC) also equipped with separate
2-wires for control.

Can be equipped with quickcoupling.
IP44 rated when fitted in ceiling

Lifetime L80 Ta25 70000h (B50)
MacAdam 3 SDCM CRI: >80

IP 44 / 21 | CE

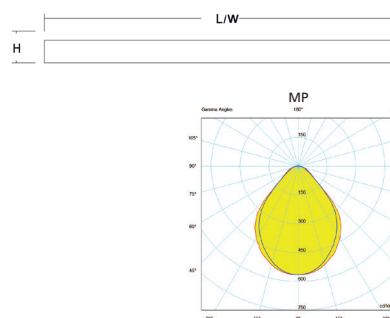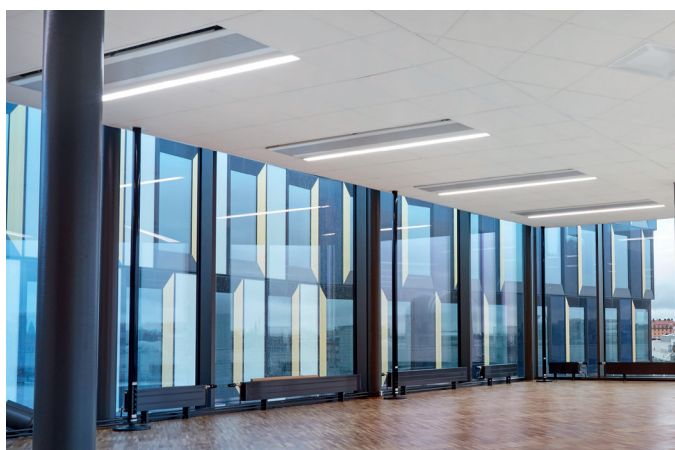

Type	Lumen	Art no. 830	E no.	Lumen	Art no. 840	E no.	L	W	H	Power	Weight
InLED 18.1 MP	2430	1 550 50	70 190 46	2530	1 550 52	70 190 47	1795	95	53	30	5,5
InLED 18.1 MP TDC *	2430	1 550 60	70 190 53	2530	1 550 62	70 190 58	1795	95	53	30	5,5

Type	Lumen	Art no. 830	E no.	Lumen	Art no. 840	E no.	L	W	H	Power	Weight
InLED 24.1 MP	3250	1 550 70	70 190 59	3390	1 550 72	70 190 60	2395	95	53	40	7
InLED 24.1 MP TDC *	3250	1 550 80	70 190 73	3390	1 550 82	70 190 74	2395	95	53	40	7

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.