

Design: Ark. SIR Gunilla Möller

Classic minimalglare luminaire with timeless design.

Available as a completely new fixture or as a conversion kit if you want to upgrade existing.

VG 9/10 corresponds to a 80W or 125W mercury light source, with less than 25% but the same lumen output.

Additional energy-saving functions can be activated, such as staged power reduction or nightdimming.

Robust lower and upper diffusers of UV-resistant polycarbonate. Diecast aluminium polebrackets.

Eloxated pure aluminium reflectors.

Mounting to ø 60 mm pole or grey painted wallbracket.

Recommended poleheight for VG 10 from 4 m.

Upper diffuser edging in grey as standard, but available in other colours.


Lifespan L80 Ta25 80000h (B50)
MacAdam 3 SDCM CRI: >80

IP 23 | CE



VG10 wall bracket Bird protector

Accessory	Art no.	E no.
VG 10 wall bracket	9 759 91	77 759 91
Bird protector	9 759 95	77 481 29
VG 10 upper diffuser	9 552 72	79 552 72
VG 10 lower diffuser	9 552 70	79 552 70

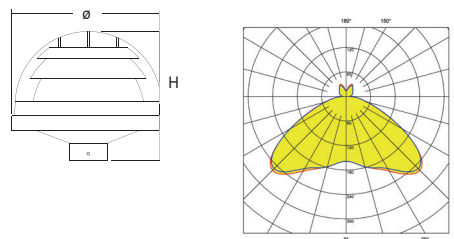

Type	Lumen	Art no.	E no.	H	ø	Power	Weight
VG 10 LED 3000 K	3050	7 555 80	77 555 80	360	555	31	6
VG 10 LED 4000 K	3110	7 555 82	77 555 82	360	555	31	6

Type	Lumen	Art no.	E no.	Power
VG 10 LED 3000 K conversion kit	3050	9 765 80	79 550 46	31
VG 10 LED 4000 K conversion kit	3110	9 765 82	79 550 48	31

Type	Lumen	Art no.	E no.	Power
VG 10 LED 3000 K conversion kit with shade	3050	9 765 81	79 550 47	31
VG 10 LED 4000 K conversion kit with shade	3110	9 765 83	79 550 49	31