


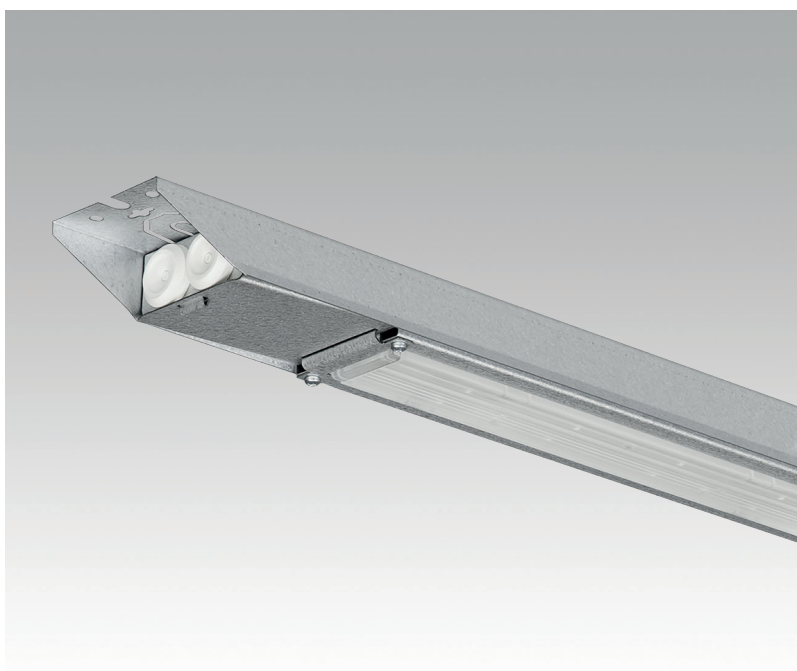

Slim industrialluminaire

Design:
Aluzinc housing

Optics :
Diffuse linearlens that controls
lightdistribution and glare.
Wide beam.

Connection:
Tool-free with openable cover. As
standard 3-phase connection 2.5mm².

Mounting:
Mounted by wire, rails or flush to
ceiling.
Integrated wirebrackets which fold out
from the housing

Dimming :
Dimmable version (TDC) for push-
buttoncontrol, Dali and built-in
corridor function.

Equipped with robust industrial driver
with high resilience against power
surges




Lifetime L80 Ta25 100000h (B50)
MacAdam 3 SDCM CRI: >80 | CE
Energyclass (LED module): D



Connection with hatch



Integrated

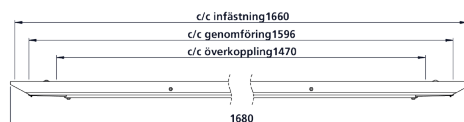

Type	Arm. lm	Art. no.	E-no.	L	W	H	c/c	Power	Weight
ID 23 7000 830	7250	1 703 00	72 178 63	1680	74	44	1660	50	3
ID 23 7000 840	7550	1 703 02	72 178 64	1680	74	44	1660	50	3
ID 23 7000 830 TDC*	7250	1 703 04	72 178 65	1680	74	44	1660	50	3
ID 23 7000 840 TDC*	7550	1 703 06	72 178 66	1680	74	44	1660	50	3
ID 23 9000 830	8770	1 703 08	72 178 67	1680	74	44	1660	63	3
ID 23 9000 840	9140	1 703 10	72 178 68	1680	74	44	1660	63	3
ID 23 9000 830 TDC*	8770	1 703 12	72 178 69	1680	74	44	1660	63	3
ID 23 9000 840 TDC*	9140	1 703 14	72 178 70	1680	74	44	1660	63	3
ID 23 12000 830	11530	1 703 16	72 178 71	1680	74	44	1660	85	3
ID 23 12000 840	12010	1 703 18	72 178 72	1680	74	44	1660	85	3
ID 23 12000 830 TDC*	11530	1 703 20	72 178 73	1680	74	44	1660	85	3
ID 23 12000 840 TDC*	12010	1 703 22	72 178 74	1680	74	44	1660	85	3

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridorfunction.