




Sleek undercabinet luminaire

Flat, RAL 9016 white powdercoated housing. Diffuser made from high-performance acrylic opal. With or without switch button.

Also available with dimming via switch button on fixture (TD) or via external control (TDC).

Lifespan L80 Ta25 70000h (B50)
MacAdams 3 SDCM CRI>80

IP 20 | CE

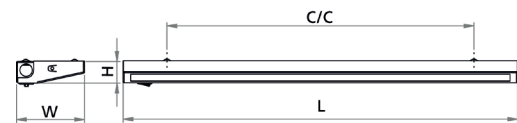

With switch button

Type	Lumen	Art no.	E no.	L	W	H	c/c	Power	Weight
IR 5 LED 1000 830	1000	1 533 34	70 137 38	600	105	33	470	9	1,8
IR 5 LED 1000 840	1040	1 533 38	70 137 39	600	105	33	470	9	1,8
IR 5 LED 1000 830 TD	1000	1 533 42	70 137 40	600	105	33	470	9	1,8
IR 5 LED 1000 840 TD	1040	1 533 46	70 137 41	600	105	33	470	9	1,8
IR 5 LED 2000 830	1910	1 533 50	70 137 42	1200	105	33	1000	18	3,2
IR 5 LED 2000 840	1990	1 533 54	70 137 43	1200	105	33	1000	18	3,2
IR 5 LED 2000 830 TD	1910	1 533 58	70 137 44	1200	105	33	1000	18	3,2
IR 5 LED 2000 840 TD	1990	1 533 59	-	1200	105	33	1000	18	3,2

Without switch button

Type	Lumen	Art no.	E no.	L	W	H	c/c	Power	Weight
IR 5 LED 1000 830	1000	1 534 34	70 154 51	600	105	33	470	9	1,8
IR 5 LED 1000 840	1040	1 534 38	70 154 52	600	105	33	470	9	1,8
IR 5 LED 1000 830 TDC *	1000	1 534 42	70 154 53	600	105	33	470	9	1,8
IR 5 LED 1000 840 TDC *	1040	1 534 46	70 154 54	600	105	33	470	9	1,8
IR 5 LED 2000 830	1910	1 534 50	70 154 55	1200	105	33	1000	18	3,2
IR 5 LED 2000 840	1990	1 534 54	70 154 56	1200	105	33	1000	18	3,2
IR 5 LED 2000 830 TDC *	1910	1 534 58	70 154 57	1200	105	33	1000	18	3,2
IR 5 LED 2000 840 TDC *	1990	1 534 59	70 154 58	1200	105	33	1000	18	3,2

*Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function