

LED bathroom lighting. Class II.


RAL 9016 white powdercoated extruded aluminium profile.
Prismatic opal acrylic shade.


Fitted to the wall. IP 44 for horizontal mounting.

Cable entry in the centre of the backside. Surface-mounted cables can be used.

Lifespan L70 Ta25 50000h (B50)
MacAdam 3 SDCM CRI: >80

IP 44 | CE 

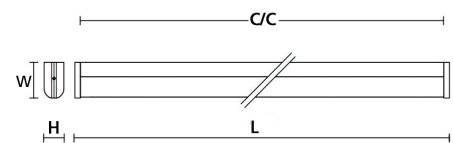

Type	Lumen	Art no.	E no.	L	W	H	c/c	Power	Weight
IR 9 LED 1500 830	1120	1 534 19	70 138 64	640	77	43	625	11	1,5
IR 9 LED 1500 840	1150	1 534 17	70 138 65	640	77	43	625	11	1,5
IR 9 LED 1500 830 Sensor 	1120	1 534 25	70 163 29	640	77	43	625	11	1,5