

Luminaire for recessed grouped assembly in various formations. Refer to the assembly examples below.

White painted galvanised housing and frame RAL 9016.

Fit to 600 modular ceiling with T-profile.

Available as accessory: frame for extra recessed (+ 50 mm) which provides a shaft of light effect.

Equipped with Microprismatic and foil diffuser (MP) or Opal plate developed for LED (OP).

Amplitudedimming on TDC version, Touch-Dim or Dali versions, also has an integrated corridor function. Ballast located inside fixture.


As standard with Halogen-free 2.5 m cable with earthed plug Adjustable fixture (TDC) also equipped with separate 2-wires for control.

IP44 rated when fitted in ceiling.


Lifespan L80 Ta25 63000h (B50)
MacAdam 3 SDCM CRI: >80

IP 44 / 21 | CE


Example of assembly

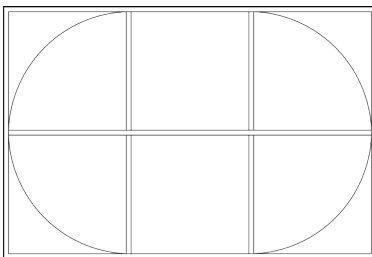

Oval:
Four InLED 6.6 Corner and two InLED 6.6

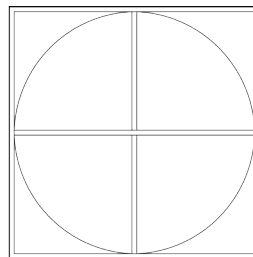

CirceL
Four InLED 6.6 Corner



Accessories	Art no.	E no.
InLED 6.6 increased recess frame (+ 50 mm)	9 550 92	-

Type	Lumen	Art no.	E no.	L	W	H	Power	Weight
InLED 6.6 OP Corner 830	4320	1 549 45-H	-	595	595	50	38	4
InLED 6.6 OP Corner 840	4400	1 549 46-H	-	595	595	50	38	4
InLED 6.6 OP Corner 830 TDC *	4320	1 548 45-H	-	595	595	50	38	4
InLED 6.6 OP Corner 840 TDC *	4400	1 548 46-H	-	595	595	50	38	4

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.