


12.2

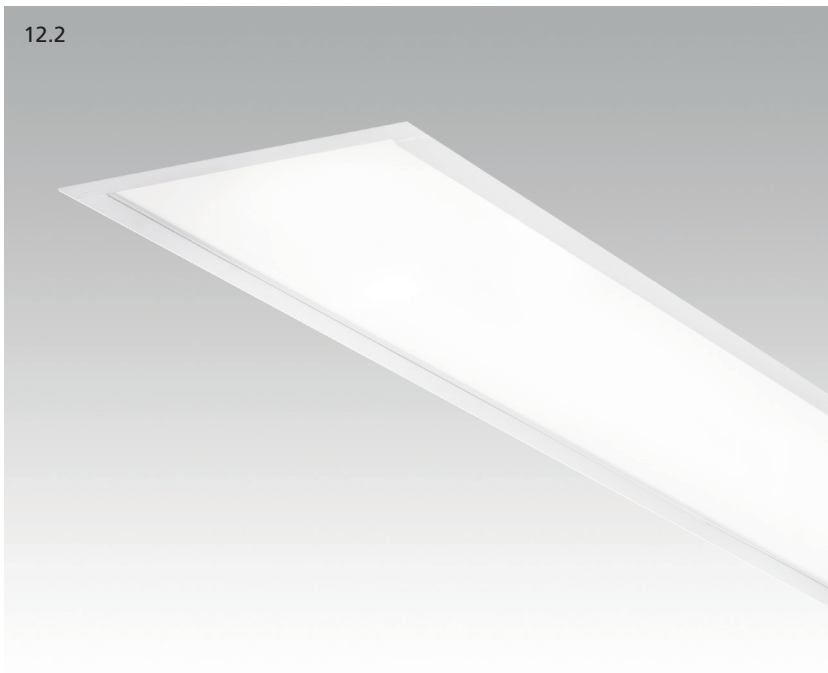

Fixture for recessed mounting.

White painted galvanised housing and frame RAL 9016.

Fitted to suspended ceiling with T-section.

Equipped with microprismatic and foil diffuser (MP) or Opal plate developed for LEDs (OP).


Amplitudedimming on TDC, Touch-Dim or Dali versions, also has an integrated corridor function. Ballast located inside fixture.

As standard with Halogen-free 2.5 m cable with earthed plug Dimmable (TDC) also equipped with separate 2-wires for control.

IP44 rated when fitted in ceiling.

Lifespan L80 Ta25 70000h (B50)  
MacAdam 3 SDCM CRI: >80

IP 44 / 21 | CE

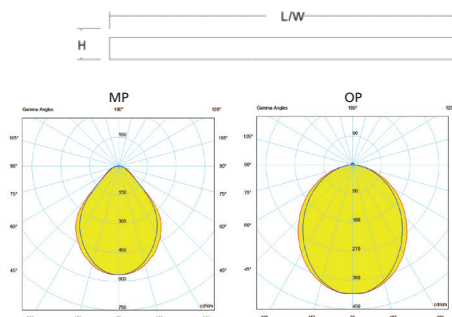

Type	Lumen 830	Art no. 830	E no.	Lumen 840	Art no. 840	E no.	L	W	H	Power	Weight
InLED 6.1 MP	790	1 549 50	70 108 48	820	1 549 56	70 108 55	595	95	50	10	2,5
InLED 6.1 OP	960	1 549 54	70 108 49	990	1 549 58	70 108 57	595	95	50	10	2,5
InLED 6.2 MP	2020	1 549 08	70 108 44	2100	1 549 09	70 108 46	595	195	50	19	3
InLED 6.2 OP	2350	1 549 14	70 108 45	2450	1 549 16	70 108 47	595	195	50	19	3
InLED 6.1 MP TDC *	760	1 548 50	70 108 51	820	1 548 56	70 108 58	595	95	50	10	2,5
InLED 6.1 OP TDC *	890	1 548 54	70 108 54	900	1 548 58	70 108 59	595	95	50	10	2,5
InLED 6.2 MP TDC *	2020	1 548 08	70 540 77	2100	1 548 09	70 541 60	595	195	50	19	3
InLED 6.2 OP TDC *	2350	1 548 14	70 541 63	2450	1 548 16	70 541 66	595	195	50	19	3

Type	Lumen 830	Art no. 830	E no.	Lumen 840	Art no. 840	E no.	L	W	H	Power	Weight
InLED 12.1 MP	1630	1 549 66	70 108 91	1700	1 549 70	70 108 95	1195	95	50	20	3,5
InLED 12.1 OP	1980	1 549 68	70 108 92	2070	1 549 72	70 108 96	1195	95	50	20	3,5
InLED 12.2 MP	4340	1 549 30	70 108 69	4520	1 549 32	70 108 86	1195	195	50	36	4
InLED 12.2 OP	5000	1 549 34	70 108 83	5100	1 549 36	70 108 87	1195	195	50	36	4
InLED 12.1 MP TDC *	1630	1 548 66	70 108 93	1700	1 548 70	70 108 97	1195	95	50	20	3,5
InLED 12.1 OP TDC *	1980	1 548 68	70 108 94	2070	1 548 72	70 108 98	1195	95	50	20	3,5
InLED 12.2 MP TDC *	4340	1 548 30	70 108 84	4520	1 548 32	70 541 67	1195	195	50	36	4
InLED 12.2 OP TDC *	5000	1 548 34	70 541 68	5100	1 548 36	70 541 69	1195	195	50	36	4
InLED 12.2 8000 OP	7800	1 549 33	70 169 31	8120	1 549 39	70 169 32	1195	195	50	60	4
InLED 12.2 8000 OP TDC *	7800	1 549 33-TD	70 169 33	8060	1 549 39-TD	70 169 34	1195	195	50	60	4

\* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.