



Recessed luminaire with lightwellIII-look.

Large illuminated surface makes a pleasant experience.

Fit to 600 modular ceiling with T-profile.

White powdercoated parts RAL 9016.


Housing made of spun aluminium, Diffusor by opalized acrylic.

Connection to separated driverbox, with halogenfree 5-wires cable 2,5m.

As standard dimmable driver.

Lifetime L80 Ta25 70000h (B50)
MacAdam 3 SDCM CRI: >80

IP 20 I CE

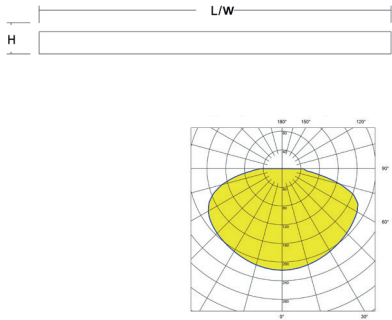

Type	Lumen	Art no.	E-no.	L	W	H	Power	Weight
InPi ø600 830 TDC *	2040	5 550 31	70 188 87	595	595	120	37	5,5
InPi ø600 840 TDC *	2130	5 550 35	70 188 88	595	595	120	37	5,5

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.