

Pendant with uplight



Adjustable wire suspension



Interior ceiling fixture or suspended assembly with or without uplight.

Sheetmetal housing with RAL 9010 textured white paint. Plastic endcaps. Metallised doubleparabolic anti-glare louvre (SP) with integrated opal diffuser.

Ceiling version:

Connection at ends or centre of fixture. Fixing with keyhole.

Pendantt uplight version: As standard with adjustable suspension wire with halogen-free cable 2.4 m with earthed plug. Version available with separated down-/uplight (ST).

Dimmable version (TDC) equipped with Dali dimmable driver, push-button control and corridor function. Pendant equipped with 5-wire cable.

Can be fitted with sensor and pull-cord switch.


AirC:

Sensorsystems with daylightcontrol that can be programmed via app. The sensor can also communicate wirelessly with more sensors. Wireless switches can be integrated in this system.

Lifespan L80 Ta25 60000h (B50)
MacAdams 3 SDCM CRI: >80

IP 20 | CE **AirC**

Accessory	Art no.	E-no.
Rails for 600 T-section with slide screws	9 552 18	70 143 72
M6 clips for T-section	9 552 08	-
Switch AirC SwitchDim 1 pole	9 688 20	79 852 54

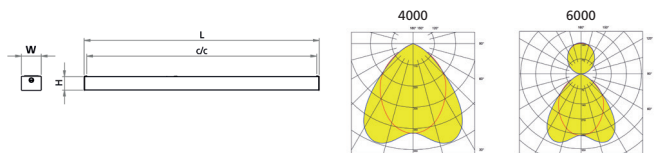

Ceiling

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 4000	3880	1 545 10	70 149 55	4030	1 545 11	70 149 56	1193	101	73	1140	37	3,6
OfficeLED 4000 TDC *	3880	1 545 20	70 149 57	4030	1 545 21	70 149 58	1193	101	73	1140	37	3,6
OfficeLED 4000 AirC *	3880	1 547 10	70 162 98	4030	1 547 11	70 162 99	1193	101	73	1140	37	3,7

Suspended

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED P 4000	3880	1 545 30	70 149 59	4030	1 545 31	70 149 60	1193	101	73	1140	37	3,6
OfficeLED P 4000 TDC *	3880	1 545 40	70 149 61	4030	1 545 41	70 149 62	1193	101	73	1140	37	3,6
OfficeLED P 4000 AirC *	3880	1 547 30	70 163 00	4030	1 547 31	70 163 01	1193	101	73	1140	37	3,7

Suspended uplight

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 6000	5900	1 545 50	70 149 63	6140	1 545 51	70 149 64	1193	101	73	1140	54	4
OfficeLED 6000 TDC *	5900	1 545 60	70 149 65	6140	1 545 61	70 149 66	1193	101	73	1140	54	4
OfficeLED 6000 AirC *	5900	1 547 50	70 163 02	6140	1 547 51	70 163 03	1193	101	73	1140	54	4,1

Suspended uplight or downlight with separate switch

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 6000 ST	5900	1 545 70	70 149 67	6140	1 545 71	70 149 68	1193	101	73	1140	54	4
OfficeLED 6000 ST TDC *	5900	1 545 80	70 149 69	6140	1 545 81	70 149 70	1193	101	73	1140	54	4

* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.