



Modern sleek floodlight for a wide variety of applications.

Diecasted aluminium housing with coolingfins on the outside. Painted RAL 7039 anthracite grey with UV-resistant polyester powder coating. 4 mm tempered glass with foldable lid locked by aluminium clips.

Mounting via adjustable bracket. 60 mm pole-top adapter or wall bracket available as accessories. Pole-top adapter (A) max. two luminaires.

Connection via gland with ventilated membrane. Driver integrated into luminaire. Equipped with 6kV surge protector.

Asymmetrical light distribution (AS) or street light optic (ST).

Available in other light colours and also with Dali dimming.

Colourtemperature 4000K.  
Lifespan L80 Ta25 50000h (B50).  
MacAdam 4 SDCM CRI: >70


IP 66 | IK 10 | CE



Pole-top adapter A


Pole-top adapter B

Wall bracket 750 mm

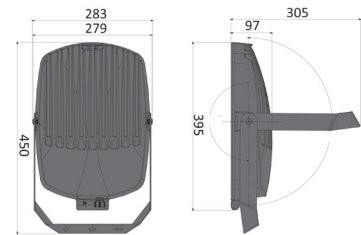

AS

ST

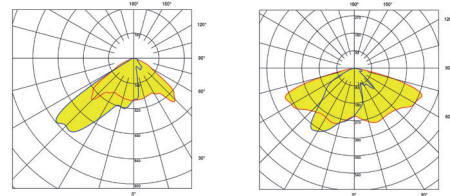

Accessory	Art no.
Pole-top adapter A ø 60 mm	9 554 07
Pole-top adapter B ø 60 mm	9 582 12
Wall bracket 750 mm	9 582 01

Type	Lumen	Art no.	E no.	Power	Windarea	Weight
Pixel LED 4000 AS	3730	7 581 40	77 623 43	35	0,112 m <sup>2</sup>	5,7
Pixel LED 7000 AS	7170	7 581 42	77 623 44	67	0,112 m <sup>2</sup>	6,0
Pixel LED 10000 AS	11520	7 581 44	77 623 47	101	0,112 m <sup>2</sup>	6,2
Pixel LED 13000 AS	13840	7 581 46	77 623 48	135	0,112 m <sup>2</sup>	6,4

Type	Lumen	Art no.	E no.	Power	Windarea	Weight
Pixel LED 4000 ST	3340	7 581 48	77 623 49	35	0,112 m <sup>2</sup>	5,7
Pixel LED 7000 ST	6480	7 581 50	77 623 50	67	0,112 m <sup>2</sup>	6,0
Pixel LED 10000 ST	10430	7 581 52	77 623 53	101	0,112 m <sup>2</sup>	6,2
Pixel LED 13000 ST	12890	7 581 54	77 623 54	135	0,112 m <sup>2</sup>	6,4