



Round sleek bollard IP 54.

Diecasted aluminium phosphated housing, Painted graphite RAL 7016 with UV-resistant polyester powdercoating.

Clear polycarbonate cover. Stainless screws and aluminium reflector.

For mounting on foundation adapter or baseplate for casting. See accessories.

Driver connected with 5-pole 10mm² screw terminal. Equipped with fuse and 10kV surge protector.

Lifespan L80 Ta25 50000h (B50)
MacAdam 3 SDCM CRI: >80



IP 54 | IK 08 | CE



Foundation adapter



Baseplate

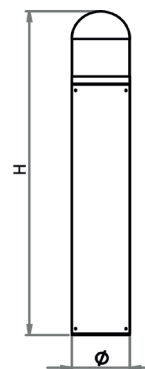

Accessory	Art no.	E no.
Foundation adapter \varnothing 60/700 L = 530 mm	7 593 81	77 482 81
Foundation adapter \varnothing 108/700 L = 480 mm	7 593 80	77 482 82
Baseplate	7 593 82	77 482 83

Type	Lumen	Art no.	E no.	H	\varnothing	Power	Weight
Pollux Cone LED 1500 830	1450	7 594 31	77 482 86	1000	170	15	4
Pollux Cone LED 1500 840	1510	7 594 33	77 482 87	1000	170	15	4
Pollux Cone LED 2400 830	2250	7 594 35	77 482 98	1000	170	24	4
Pollux Cone LED 2400 840	2300	7 594 37	77 482 99	1000	170	24	4