

Robust IP 65 wall and ceiling luminaire.

Diecast aluminium housing and front. UV-resistant, polyester powder coated RAL 7016.

Two holes for surface-mounted cable, max.  $\varnothing$ 12 mm. 5-pin terminalblock up to 2.5 mm<sup>2</sup>.



Sturdy polycarbonate diffuser. Stainless screws (AISI 304).

Can be used with safety screws and HF sensor.

HF sensors detect all forms of movement, not just from humans and animals. This means that it can detect the movement of branches or leaves, for example. Take this into consideration when installing so that there are no unwanted functions.

Lifespan L80 Ta25 50000h (B50)  
MacAdam 3 SDCM CRI: >80

IP 65 | IK 10 | CE

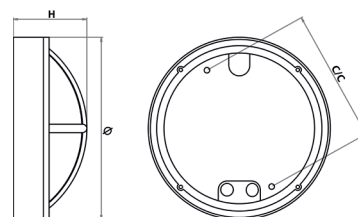

Accessory	Art no.	E no.
Security screws	7 410 02	79 550 02

Type	Lumen	Art no.	E no.	H	c/c	ø	Power	Weight
Robust II Cross 1000 830	950	7 172 01	77 035 61	105	190	257	18	2,2
Robust II Cross 1000 840	970	7 172 05	77 035 62	105	190	257	18	2,2
Robust II Cross 1000 830 Dali	950	7 172 02	77 035 65	105	190	257	18	2,2
Robust II Cross 1000 840 Dali	970	7 172 06	77 035 66	105	190	257	18	2,2