



Sleek fixture for mounting on pole.

Diecasted aluminium housing with cooling fins on outside.

Painted RAL 7039 anthracite grey with UV-resistant polyester powder coating. 4 mm tempered glass with foldable lid locked by aluminium clips. Integrated adjustable post bracket for 60 mm post.



Connection via gland with ventilated membrane. Driver integrated into fixture. Equipped with 6kV surgeprotector.

Asymmetric light distribution (AS) or street light optic (ST).

Available in other light colours and also with Dali dimming.

Colourtemperature 4000K.  
Lifespan L80 Ta25 50000h B50  
MacAdams 4 SDCM CRI: >70

IP 66 | IK 10 | CE

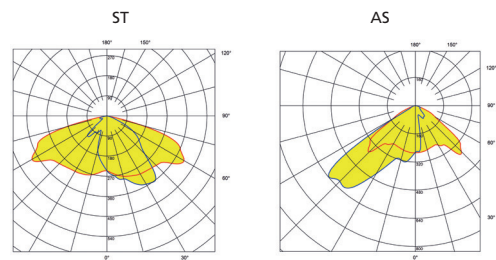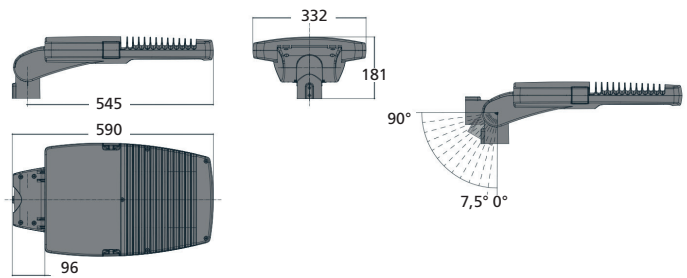

Type	Lumen	Art no.	E no.	Power	Area	Weight
Skyline 4000 ST	3350	7 587 00	77 642 42	32	0,163m <sup>2</sup>	10
Skyline 7000 ST	6700	7 587 02	77 642 43	64	0,163m <sup>2</sup>	10
Skyline 10000 ST	10050	7 587 04	77 642 44	96	0,163m <sup>2</sup>	10
Skyline 13000 ST	13400	7 587 06	77 642 45	128	0,163m <sup>2</sup>	10

Type	Lumen	Art no.	E no.	Power	Area	Weight
Skyline 4000 AS	3350	7 587 10	-	32	0,163m <sup>2</sup>	10
Skyline 7000 AS	6700	7 587 12	-	64	0,163m <sup>2</sup>	10
Skyline 10000 AS	10050	7 587 14	-	96	0,163m <sup>2</sup>	10
Skyline 13000 AS	13400	7 587 16	-	128	0,163m <sup>2</sup>	10