



IP 65 wall-mounted downlight.



Chromated and powder coated housing. RAL 7016 dark grey as standard.

Tempered safety glass and stainless screws. Pure aluminium reflectors.

Can be fitted with Dali dimming.

Lifespan L80 Ta25 50000h (B50)
MacAdams 3 SDCM CRI:>80

IP 65 | IK 07 | CE

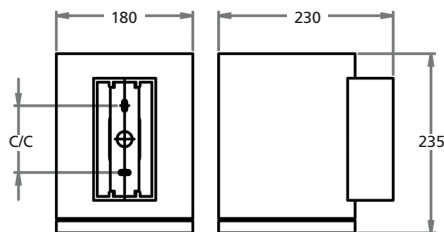

Type	Lumen	Art no.	E no.	D	W	H	c/c	Power	Weight
Timbal Wall D 2000 830	1840	7 215 01	77 031 06	230	180	235	88	22	6
Timbal Wall D 2000 840	1880	7 215 05	77 031 07	230	180	235	88	22	6
Timbal Wall D 3000 830	2650	7 215 07	77 031 08	230	180	235	88	33	6
Timbal Wall D 3000 840	2700	7 215 09	77 031 09	230	180	235	88	33	6